


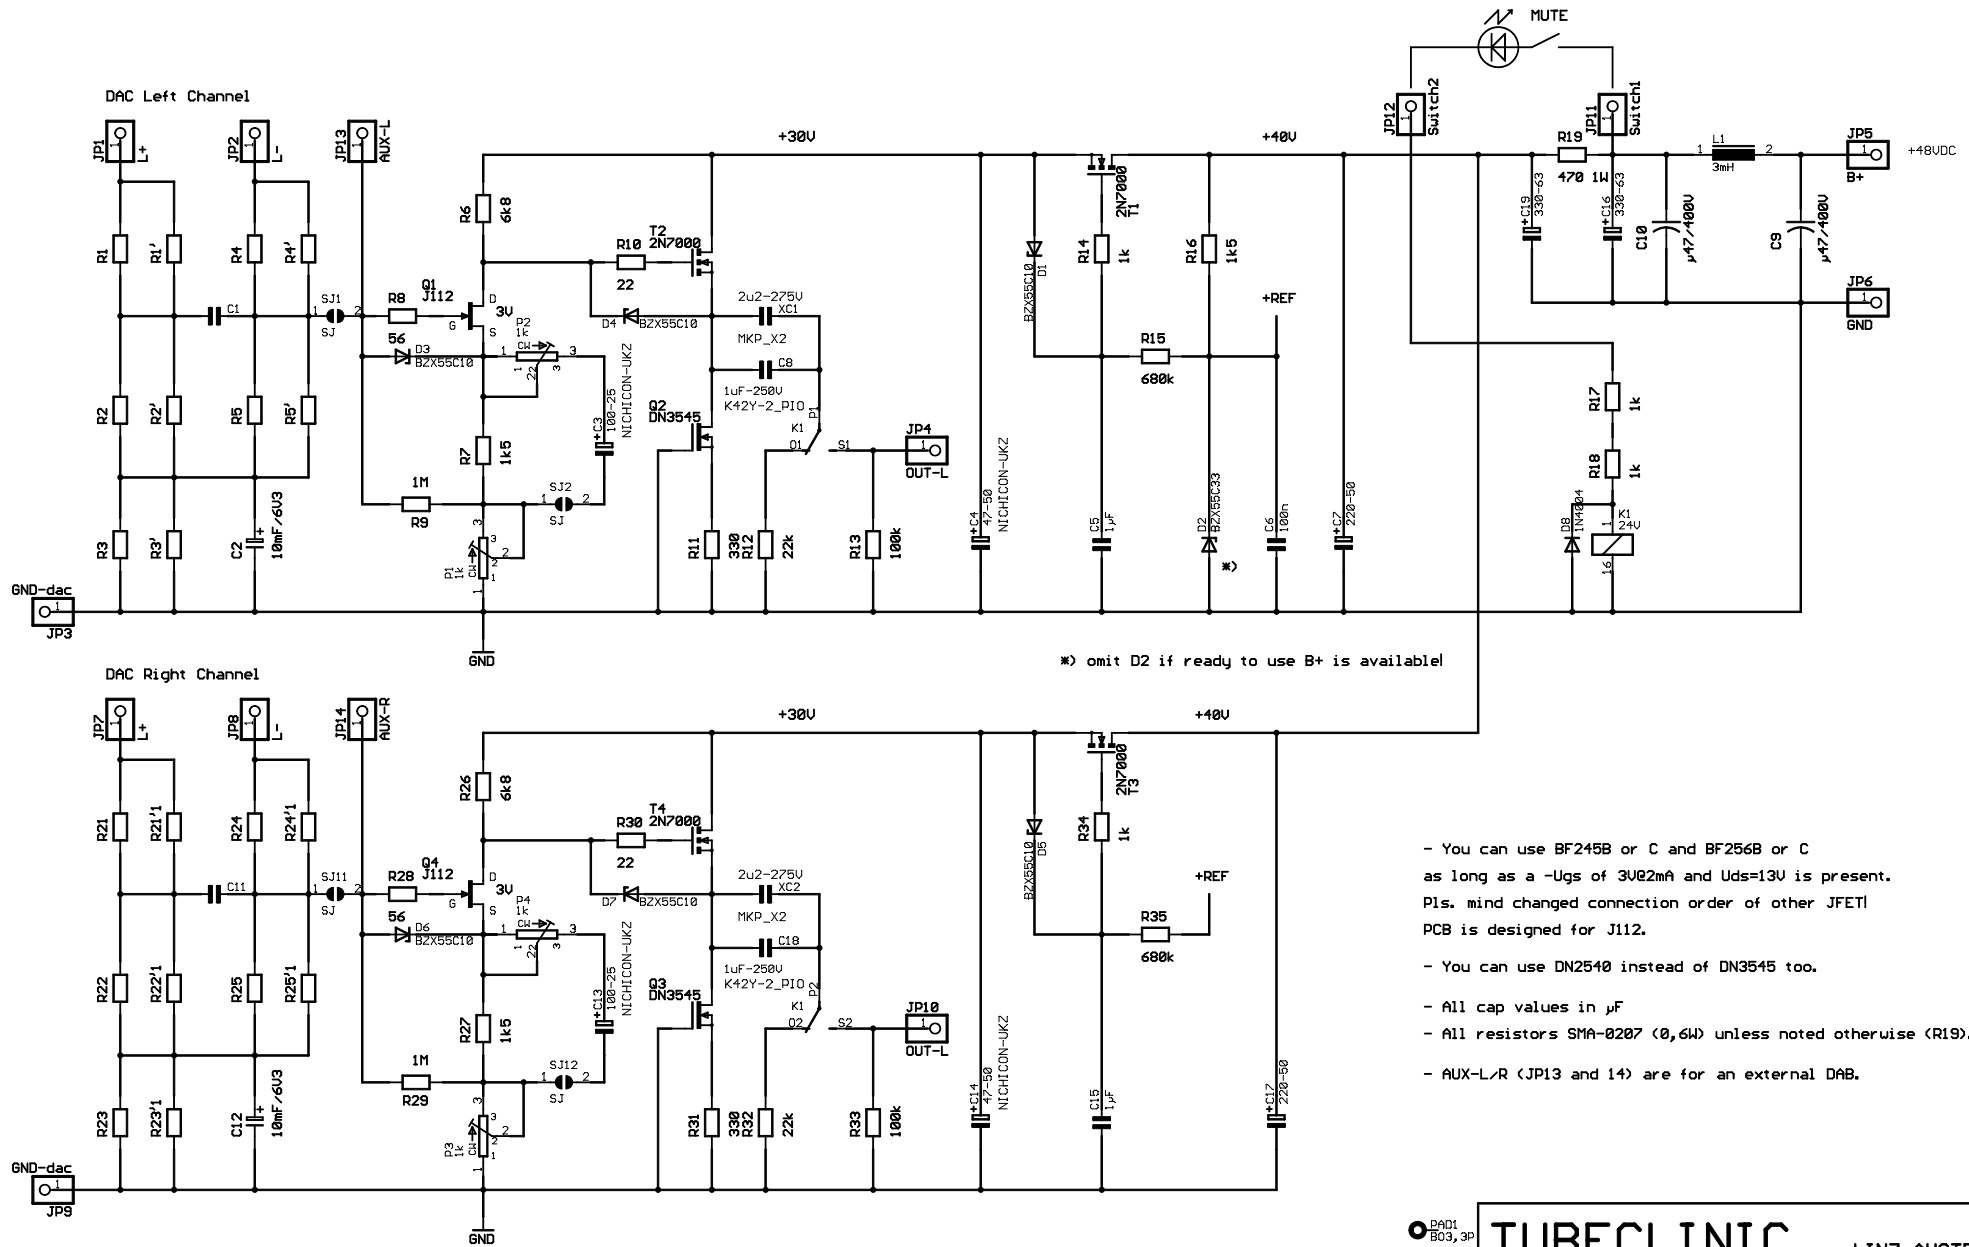


* omit D2 if ready to use B+ is available

- You can use BF245B or C and BF256B or C as long as a $-U_{GS}$ of 3V@2mA and $U_{DS}=13V$ is present. Pls. mind changed connection order of other JFET! PCB is designed for J112.
- You can use DN2540 instead of DN3545 too.
- All cap values in μF
- All resistors SMA-0207 (0,6W) unless noted otherwise (R19).
- AUX-L/R (JP13 and 14) are for an external DAB.

○ PAD1
B03, 3P
○ PAD2
B03, 3P
○ PAD3
B03, 3P
○ PAD4
B03, 3P

TUBECLINIC		LINZ/AUSTRIA
TITLE: CHEAPO_Mk2_PRO		
Document Number: 2402.001-BEG		REV: U1.2
Date: 30.05.2024 03:50:02		Sheet: 1/1


TUBECLINIC Linz/AUSTRIA

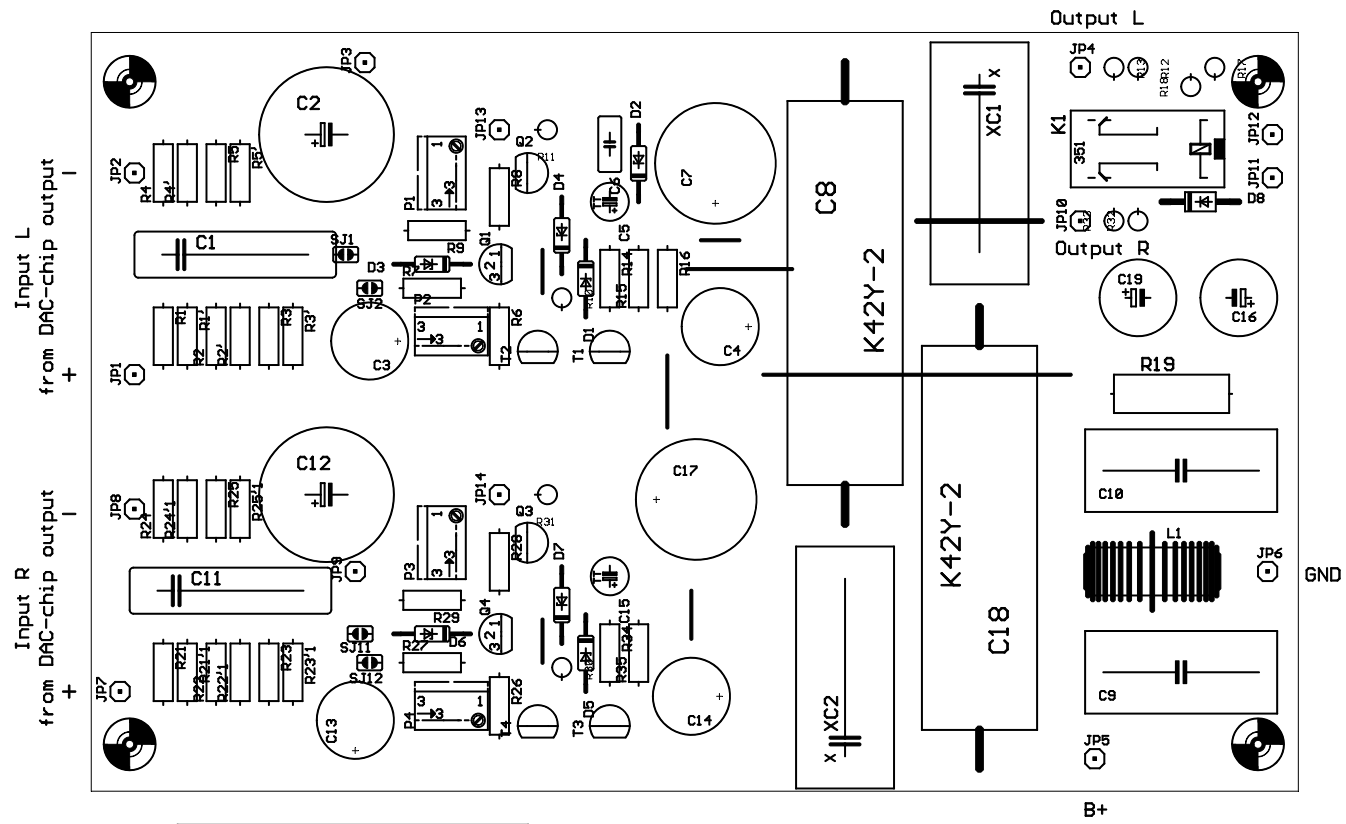

E1 Cheapo Mk2-PRO

© by Barbara E. Gerhold 2024/02

TUBECLINIC Linz/AUSTRIA

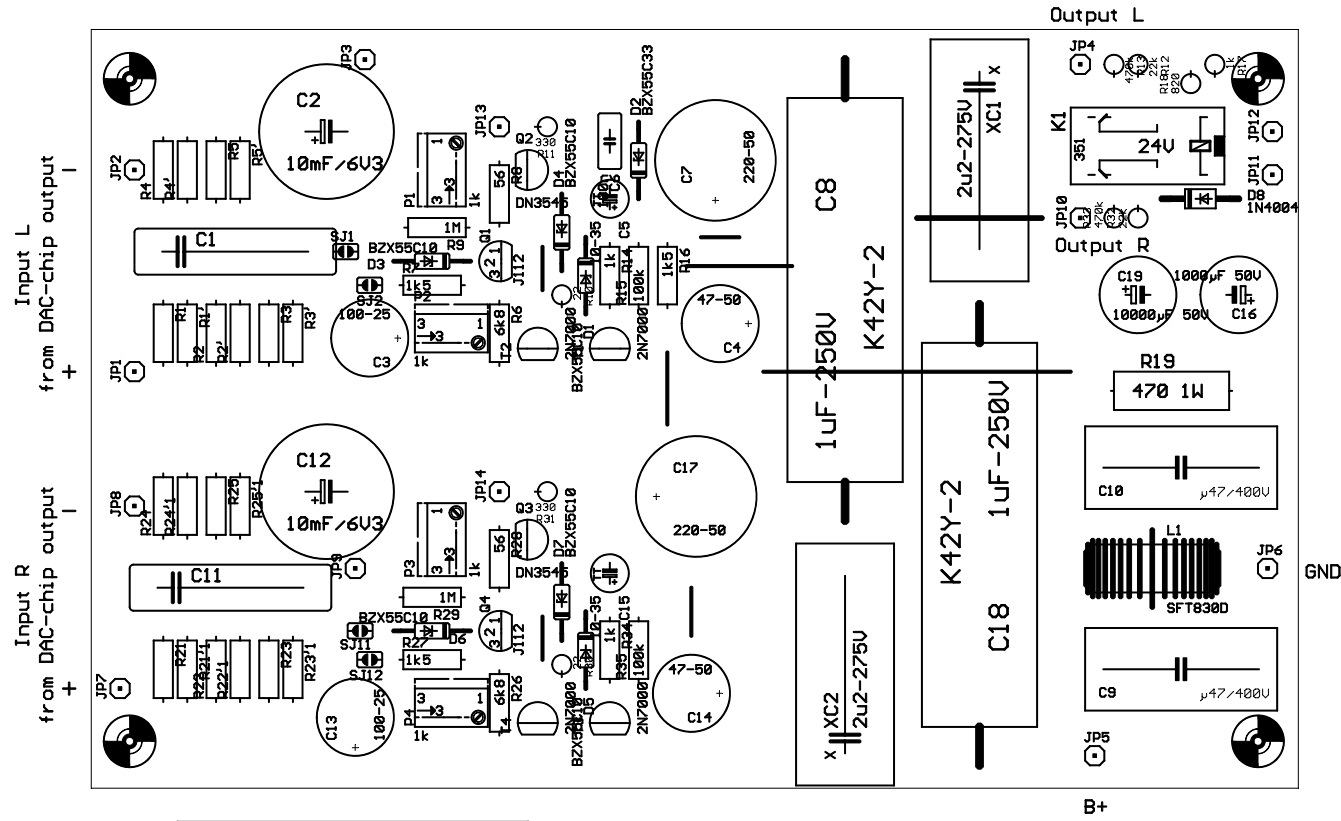

E1 Cheapo Mk2-PRO

© by Barbara E. Gerhold 2024/02

